
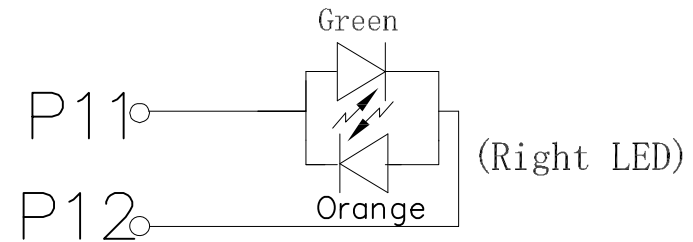
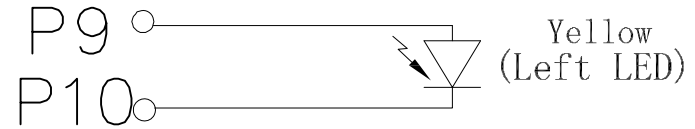


PC Board Layout

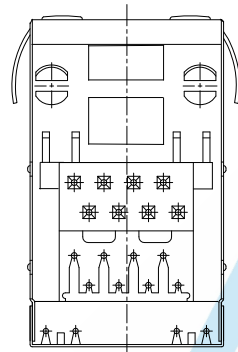

NOTES:

ELECTRICAL:



- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMSMAX
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 NDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
- 2. CONTACT MATERIAL : DIAMETER0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
- 3. SHIELD : 0.20~0.25MM THICKNESS BRASS WITH NI PLATED.
- 4. MATING/UNMATING FORCE : 2.2KG. F MAX.
- 5. RETENTION STRENGTH : 7.7KG. F MIN BETWEEN JACK AND PLUG.
- 6. OPERATING LIFE : 750CYCLES MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C ~+85°C REATIVE HUMIDITY<70%
- 2. OPERATION : -40°C ~+85°C

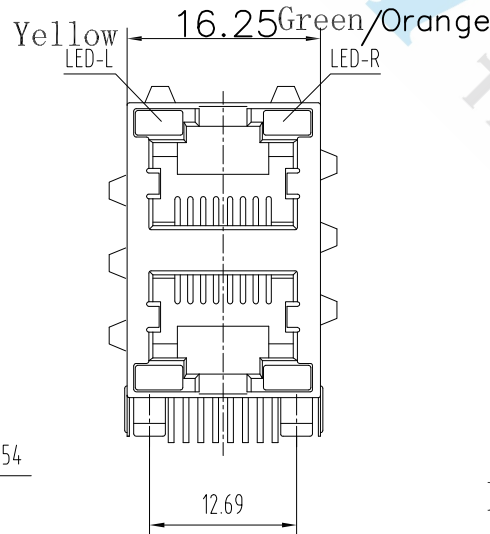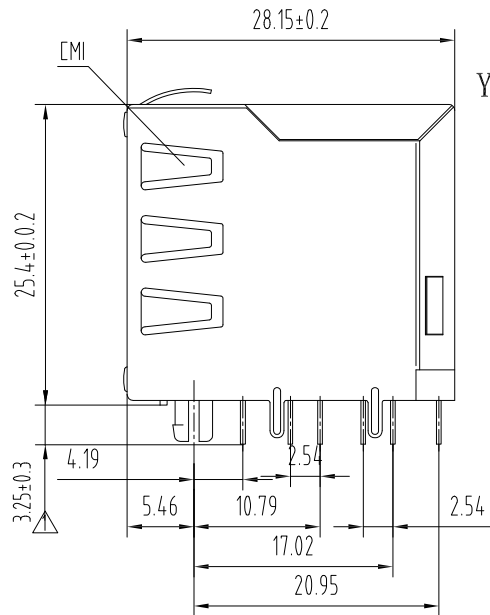

DIMENSIONS TOLERANCE	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審核(CH'K)	Calvin
Up to 5	±0.2					
Above 5~15	±0.3					
Above 15~30	±0.4					
Above 30~50	±0.5					
Angle	±0.3°					

數量(QT'Y)	MM	處理(FINISH)	SEE NOTE	審核(CH'K)	Calvin	圖名(NAME)
	N/A					RJ45 8P8C 2x1 90度 左黃右綠橙 W/EMI BACK PEG 7.11
材料(MT'L)	SEE NOTE	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	料號(PART NUMBER) WRJ5-88-21-xxRIEA9
		設計(DE'N)	Mike	日期 DATE)	MAY.22.2017	圖號(DRAW NUMBER) C006
						圖檔(FILE NAME .DWG)

WISCONN Technology Co., Ltd
Tel:02-2790-1979 Fax:02-2790-1569

比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	A
-----------	-----	----------	----	-----------	---	----------	---