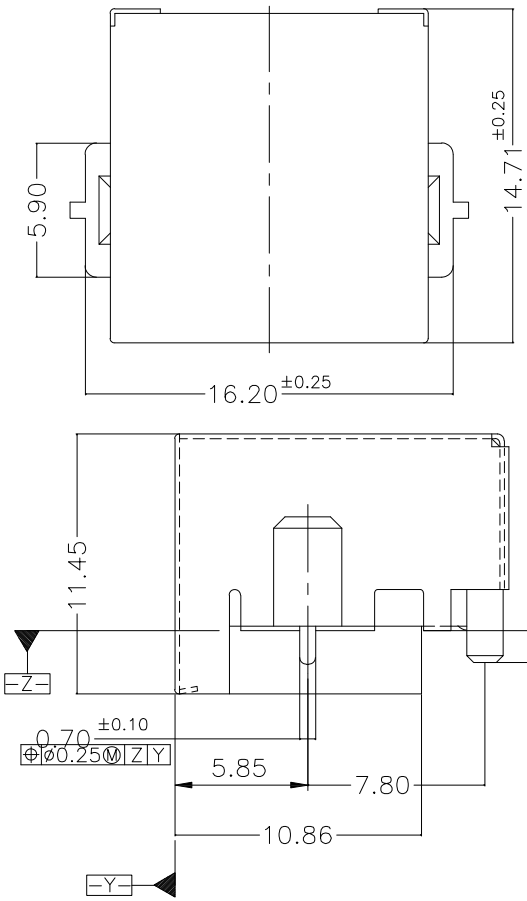

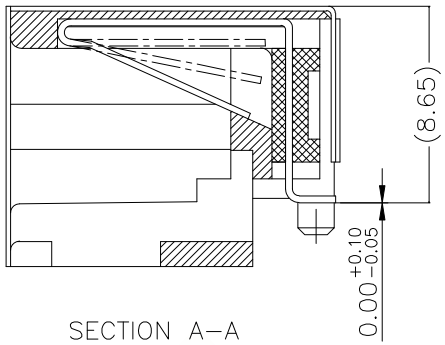

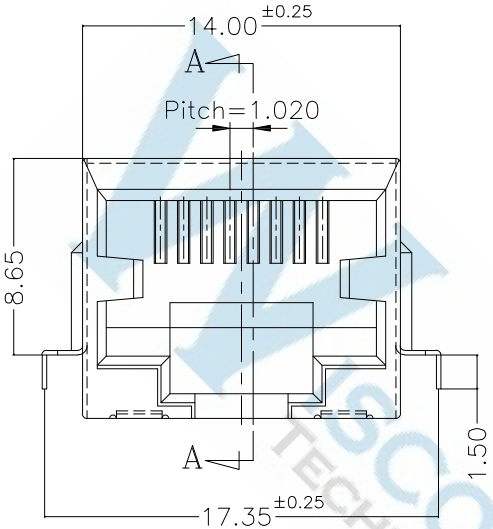

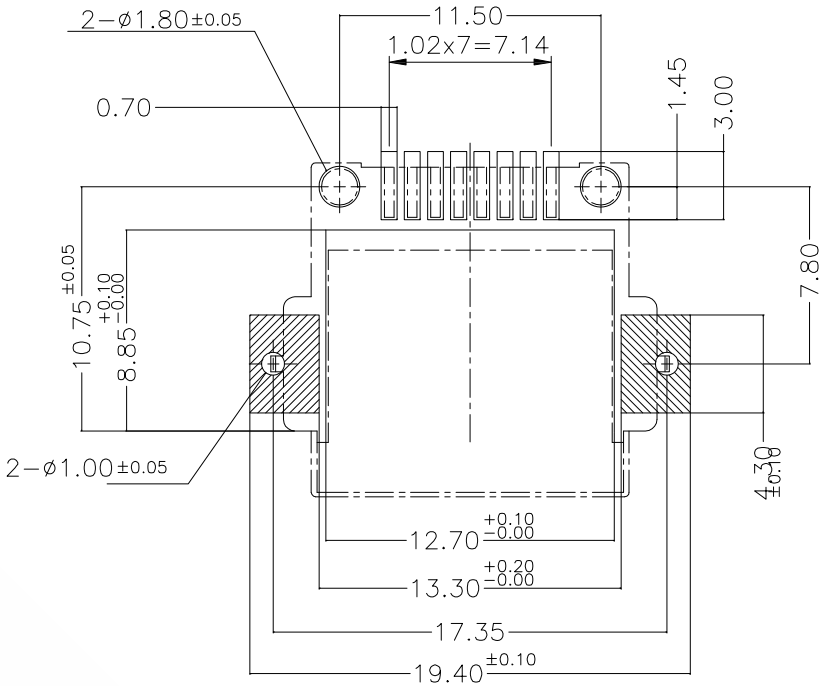

RECO MMENDED P.C.B LAYOUT
TOP VIEW (COMPONENT SIDE)

MATERIALS:

PLASTICHOUSING: HIGHTEMP.THERMOPLASTIC
FLAMMBILITYRATINGUL94V–0.

CONTACTS: PHOSPHORBRONZE

PLATING: GOLDPLATINGOVERNICKELINCONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELD: BRASSPLATINGNICKELALLOY.

Electrical:

1.Voltage Rating:125 Vac Rms.
2.Current Rating:1.5 Amp.
3.Contact Resistance:40 Milliohms Max.
4.Insulation Resistance:1000 Megohms Min @500 Vdc.
5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

1.Operating:750 Cycles Min.

Environmental:

1.Storage:–40°C To +85°C.
2.Opertion:–40°C To +85°C.
3.IR Reflow Soldering Tempature:255°C To 265°C(5~10 Seconds).

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

DIMENSIONS TOLERANCE METRIC													
Up to 5 ±0.2 Above 5~15 ±0.3 Above 15~30 ±0.4 Above 30~50 ±0.5 Angle ±0.3°	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審校(CH'K)	Calvin	圖名(NAME)	RJ45 8P8C 1X1 沉板式 板上8.65 腳距7.8	WISCONN Technology Co.,Ltd				
	數量(QT'Y)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	料號(PART NUMBER)	WRJ5-88-11xxS1AA11	Tel:02-2790-1979 Fax:02-2790-1569				
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期(DATE)	DEC.11.2015	圖號(DRAW NUMBER)	C006	比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET) 1	版次(REV.) A
							圖檔(FILE NAME .DWG)						