
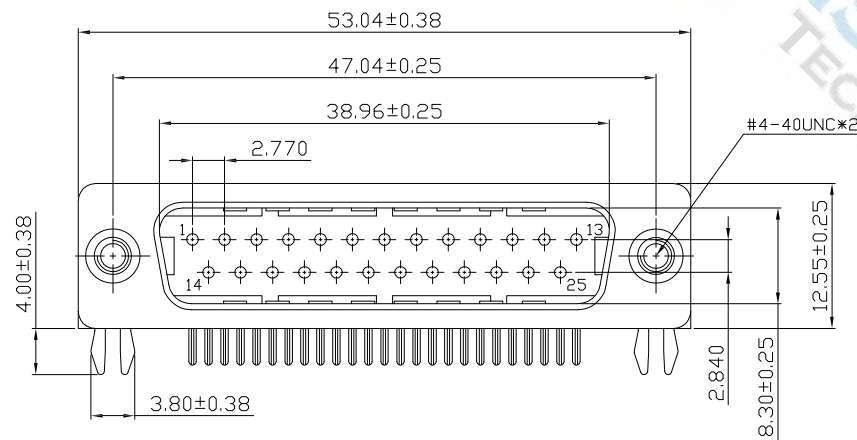


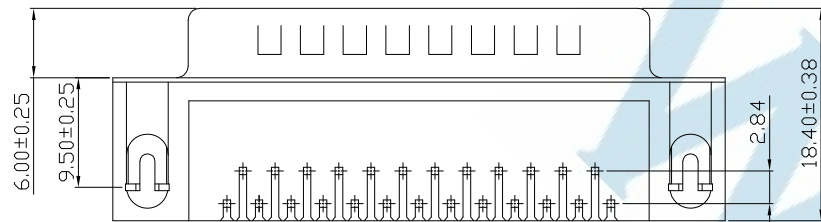


P.C.B. LAYOUT



**MATERIALS:**

1. Housing: PBT (UL 94V-0), Black
2. Contacts: Brass
3. Shell: SPCC
4. Rivet: Copper Alloy(Lead ≤ 40000PPM)
5. Board Lock: SPCC
6. Screw: SPCC(Lead ≤ 40000PPM)

**FINISH:**

1. Contacts: Gold Flash Plated on Contact Area  
Sn Plated on Solder tails  
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Sn Plated
5. Screw: Nickel Plated

DIMENSIONS TOLERANCE  
METRIC

Up to 5	±0.2
Above 5~15	±0.3
Above 15~30	±0.4
Above 30~50	±0.5
Angle	±0.3°

單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審校(CH'K)	Calvin
數量(QT'Y)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena
材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期(DATE)	DEC.26.2014

圖名(NAME)	D-SUB Male(8.08)RA GF BLACK 附螺絲	
料號(PART NUMBER)	WDBM-25FPBDR-8.08	
圖號(DRAW NUMBER)	T039	
圖檔(FILE NAME .DWG)		

<b>WISCONN Technology Co., Ltd</b>							
Tel:02-2742-1798 Fax:02-2742-1898							
比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	A