


P. C. B RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE.
ALL CENTERLINE DIMENSIONS ARE BASIC

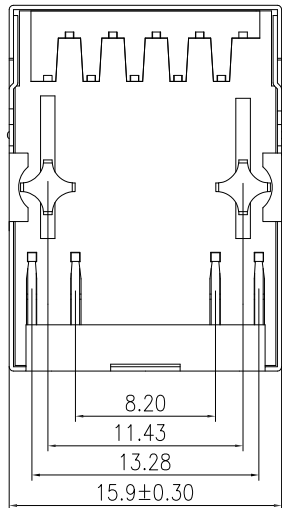

- Connector Material:
Housing: Thermoplastic UL94 V-0
Contact/Shield: Cooper alloy
Shield Plating: Nickel
Contact Plating:
Selective gold 6u"; 15u"; 30u"; 50u" Min
- Tolerances comply with F.C.C dimension requirements
- Durability: 800 mating Min
- Meets or Exceeds IEEE802.3af standards
including 350uH Min OCL @100KHz 100mV 8mA DC

LED Specification

Standard LED Color	LED Wavelength	Forward (V MAX)	Typical (V TYP)	Luminous Intensity
Green	560-580 nm	2.5V	2.1-2.2V	9-25 MCD
Yellow	580-610 nm	2.5V	2.1-2.2V	9-30 MCD
Orange	580-610 nm	2.5V	2.1-2.2V	50-100 MCD

- LED intensity/wavelength measured with Photo Research PR-650 Colormeter
- With a forward current of 20 mA, Absolute Maximum Ratings (Ta=25°C)

DIMENSIONS TOLERANCE METRIC	UNITS	MM	FINISH	SEE NOTE	CH'K	Calvin	DRAW NAME		WISCONN Technology Co., Ltd Tel: +886-2-2790-1979 Fax: +886-2-2790-1569							
Up to 5 ±0.2							RJ45 1x1Port Jack With 100/1000 Base-T 左綠右黃(正負正負)W/O									
Above 5~15 ±0.3	QTY	N/A	DRAW	Johnson	APP'D	Selena	PART NUMBER WRJ-1108F1016									
Above 15~30 ±0.4							DRAW NUMBER C006									
Above 30~50 ±0.5							FILE NAME .DWG		SCALE	1/1	SIZE	A4	SHEET	1	REV.	A
Angle ±0.3°	MT'L	SEE NOTE	DE'N	Mike	DATE	June . 29 . 2020										

