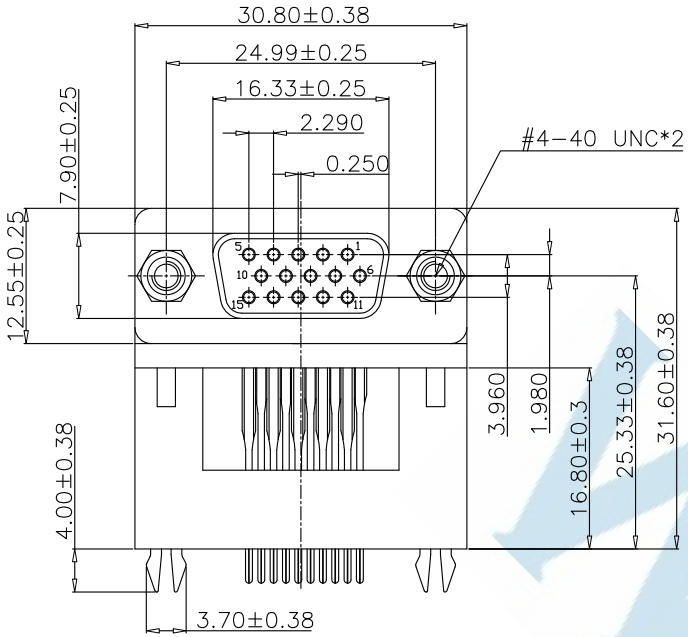

1.MATERIALS:
- 1-1 Housing: PBT (UL 94V-0), Black
- 1-2 Contacts: Brass
- 1-3 Shell: SPCC
- 1-4 Rivet: Copper Alloy(Lead≤40000PPM)
- 1-5 Board Lock: SPCC
- 1-6 Screw: SPCC(Lead≤40000PPM)

2.FINISH:
- 2-1 Contacts: Gold Flash Plated on Contact Area
  Sn Plated on Soldertails
  Nickel Under Plated Over All
- 2-2 Shell: Nickel Plated
- 2-3 Rivet: Nickel Plated
- 2-4 Board Lock: Sn Plated
- 2-5 Screw: Nickel Plated

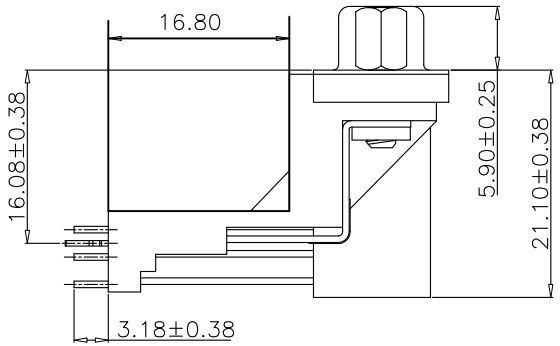

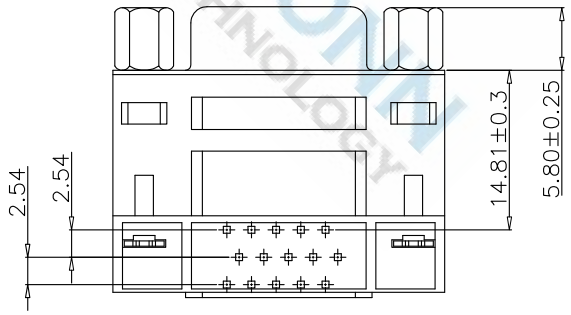

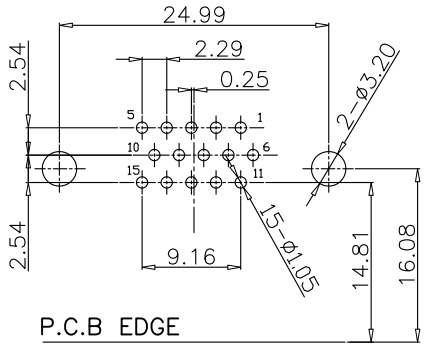

P.C.B LAYOUT

DIMENSIONS TOLERANCE METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審校(CH'K)	Calvin	圖名(NAME) D-SUB FEMALE HR CONN		WISCONN Technology Co.,Ltd Tel:02-2742-1798 Fax:02-2742-1898					
	數量(QT'Y)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	料號(PART NUMBER)	WDBHF-15FPBUDR-31.6						
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期(DATE)	OCT.15.2007	圖號(DRAW NUMBER)	T005	比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	A
							圖檔(FILE NAME .DWG)							