


PC Board Layout

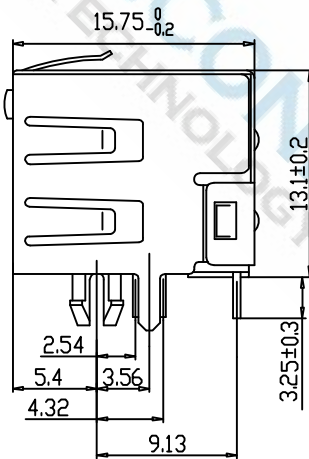

NOTES:

MATERIAL:

- 1.HOUSING MATERIAL:PBT UL94V-0 BLACK
- 2.CONTACT MATERIAL:PHOSPHOR BRONZE 0.46mm
- 3.SHELL MATERIAL:BRASS 0.25mm
- 4.CONTACT PLATING:GOLD FLASH OVER NICKEL
- 5.SHELL PLATING:NICKEL PLATED ALL

ELECTRICAL:

- 1.VOLTAGE RATING:125VAC RMS.
- 2.CURRENT RATING:1.5AMP.
- 3.CONTACT RESISTANCE:30MILLIOHMS MAX.
- 4.INSULATION RESISTANCE:500 MEGOHMS MIN@50V DC.
- 5.DIELECTRIC WITHSTANDING RESISTANCE: 1000V AC RMS 50Hz.1MIN

MECHANICAL:

- 1.DURRABILITY:750CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER:1LB MIN.

ENVIRONMENTAL:

- 1.STORAGE:-40°C~+85°C
- 2.OPERATION:0°C TO 70°C

DIMENSIONS TOLERANCE METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±3°	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審核(CH'K)	Calvin	圖名(NAME) RJ45 8P8C JACK DUAL PORT DIP(R/A), W/SHELL(3.56), W/LED	WISCONN Technology Co.,Ltd Tel:02-2742-1798 Fax:02-2742-1898					
	數量(QT'Y)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena							
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期 DATE)	OCT.15.2007	圖號(DRAW NUMBER) C004	比例(SCALE)	1/1	圖紙(SIZE) A4	頁次(SHEET) 1	版次(REV.) A	
							圖檔(FILE NAME .DWG)						