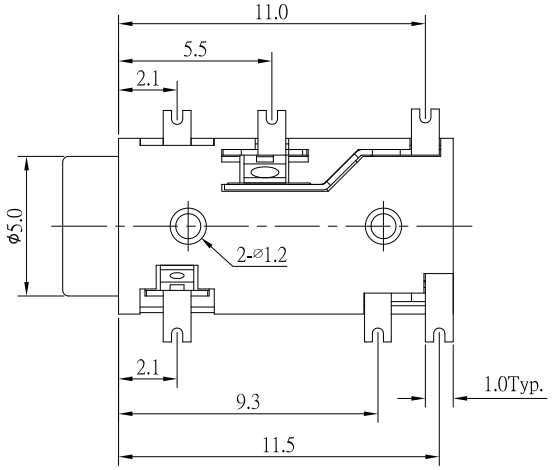

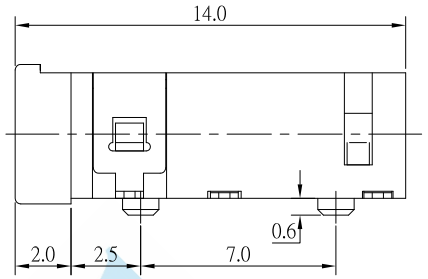

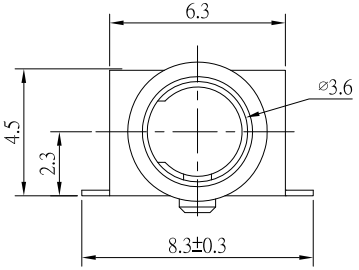

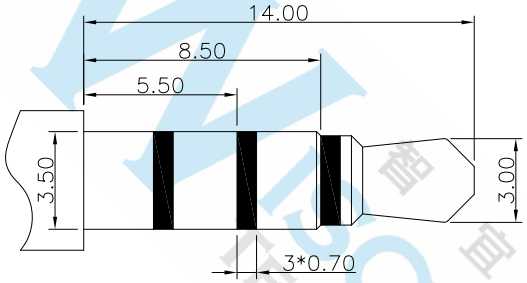

ø3.50mm 4 POLE PLUG

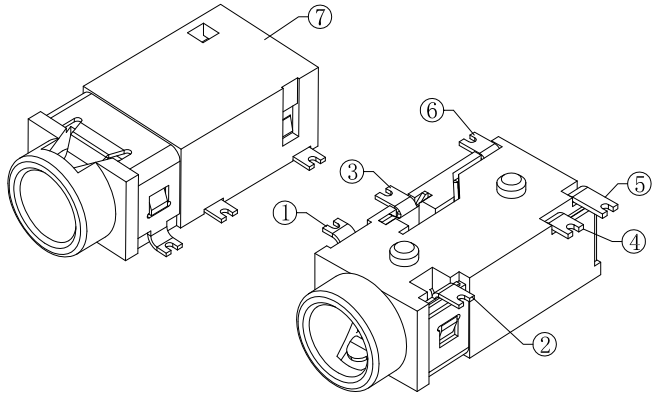

SCHEMATIC

WPJ-3896D	WPJ-3893AD	WPJ-3893D	WPJ-3894D	WPJ-3895AD	WPJ-3895BD
					

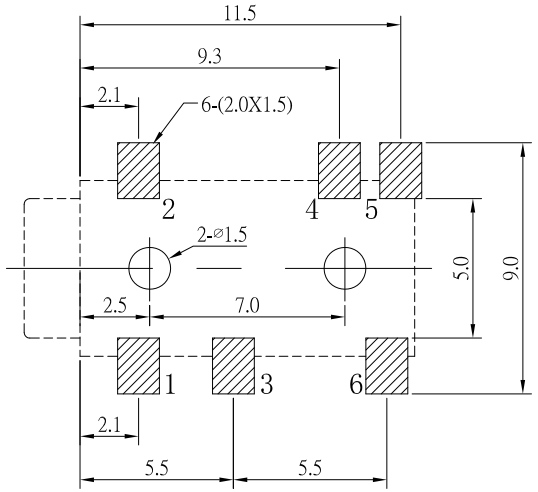

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1. Rating ：DC 30V 0.5A
2. Contact resistance：≤30mΩ
3. Insulation resistance：≥100MΩ
4. Withstand voltage：500VAC
5. Insertion and extraction force：3-30N
6. life test：5,000 cycles。

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	BRASS	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

DIMENSIONS TOLERANCE	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審校(CH'K)	Calvin	圖名(NAME)	PHONE JACK	WISCONN Technology Co.,Ltd							
METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	數量(QT'Y)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	料號(PART NUMBER)	WPJ-389xD	Tel:02-2790-1979 Fax:02-2790-1569							
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期(DATE)	NOV.03.2016	圖號(DRAW NUMBER)	T002	比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	A
							圖檔(FILE NAME .DWG)									

WISCONN TECHNOLOGY