

Note:

1. Material:



- 1.1 Insulator: LCP UL 94-V0 rated.
- 1.2 Contact: Brass, t=0.25mm.
- 1.3 Shell: K7, t=0.30mm.

2. Specification:

- 2.1 Rated voltage and current: 1.5A at 250V AC minimum.
- 2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
- 2.3 Contact resistance: Before life test 30m ohm max, After life test 50m ohm max.
- 2.4 Insulation resistance: 1000M ohm min.
- 2.5 Insertion force: 35 Newtons maximum.
- 2.6 Extraction force: 10 Newtons minimum.
- 2.7 Solderability: Terminal shall be immersed in flux before test, Then dip in molten solder for 5±0.5 sec. At 245±5°C.

3. Finishes:

- 3.1 Contacts: Gold flashed 1u", 3u", 5u", 10U", 15u", 30u".
- 3.2 Shell: Gold flashed

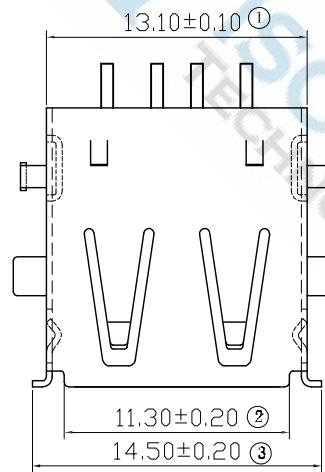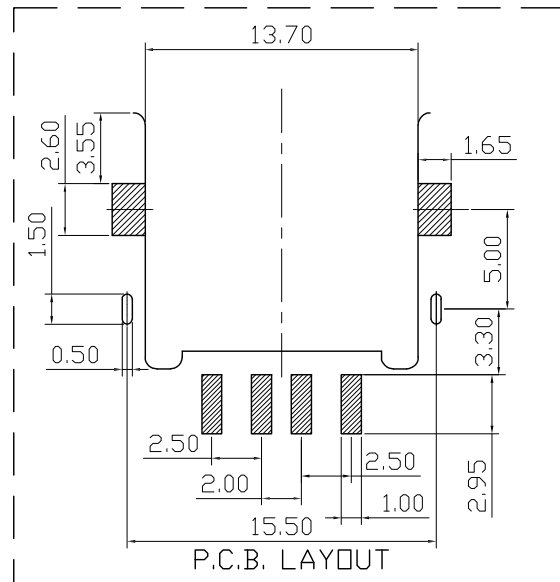

No.	Part Name	Q'ty	Material	Thickness	Finish	Notes
3	SHELL	1	K7	T=0.30±0.02mm	Gold Flashed	D4440XX
2	CONTACT	4	BRASS	T=0.25±0.02mm	Gold Flashed	A4120XX-D A4120XX-E
1	HOUSING	1	LCP		Black \ White	JCH0143

DIMENSIONS TOLERANCE	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審核(CH'K)	Calvin	圖名(NAME)		WISCONN Technology Co., Ltd Tel: 02-2742-1798 Fax: 02-2742-1898							
	METRIC	數量(QT'Y)	N/A	繪圖(DRAW)	Johnson	Selena	USB A Female SMT 反向沉板式									
.0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期(DATE)	OCT. 15. 2007	料號(PART NUMBER)	WU2AF-04FPBSSR-R	比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	A