


RECOMMENDED P.C.B.LAYOUT

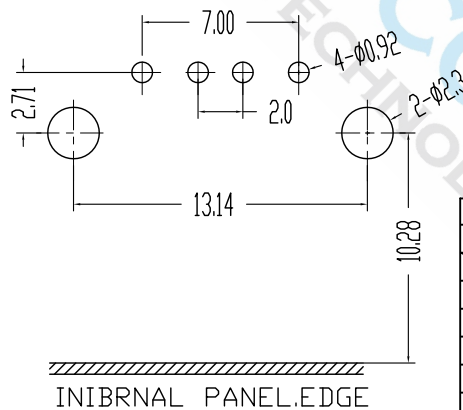

SPECIFICATIONS:

Contact current Rating:1Amperes.
 DIELECTRIC Withstanding Voltage:AC 500V
 at sea level
 Insulation resistance:1000Megohms
 Minimum.
 Contact Resistance:30 mΩ, Maximum
 operating Temperature:-55 °C to +85 °C

MECHANICAL CHARACTERISTICS:

Mating Force:3.5Kg,Maximum
 Unmating Force:1kg,Minimum.

MATERIALS:

CONTACTS:Copper Alloy.
 Insulator:Thermoplastic P.B.T.UL 34V-0
 Rated.
 Shell:Brass t=0.30;±0.02

FINISHES:

Contact:GOLD
 Shell:Nickel Plated.

TOLERANCE			
SELECT	1	2	3
DN	1	2	3
0.00±/-.002	0.02	0.05	0.10
0.00 ±/-.005	0.05	0.10	0.15
0.0 ±/-.010	0.10	0.15	0.20
0 ±/-.015	0.15	0.20	1.00
ANGLE±/-.0	1.0	1.0	1.5

No.	PART NAME	DESCRIPTION	THICKNESS	QTY	REMARK
3	OUT SHELL	SPCC	0.3mm	1	F0001
2	CONTACT	Phosphor Bronze	0.25mm	4	F0001
1	HOUSING	PBT+GF30%V0		1	F0000

DIMENSIONS TOLERANCE METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審核(CH'K)	Calvin	圖名(NAME)		WISCONN Technology Co., Ltd Tel:02-2790-1979 Fax:02-2790-1569							
	數量(QTY)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	USB.2.0 A/F 反向 14.0mm/青蛙腳									
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期 DATE)	JUL.13.2016	料號(PART NUMBER)	WU2AF-4-xxxCR1-R11								
							圖號(DRAW NUMBER)	C008	圖檔(FILE NAME .DWG)	比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)