


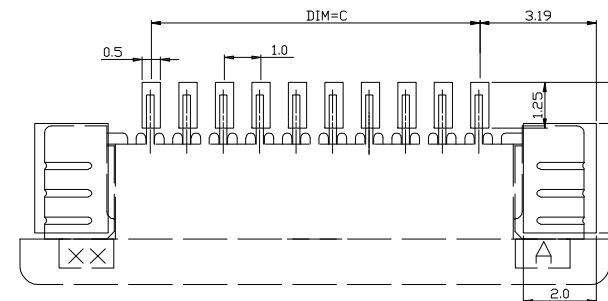


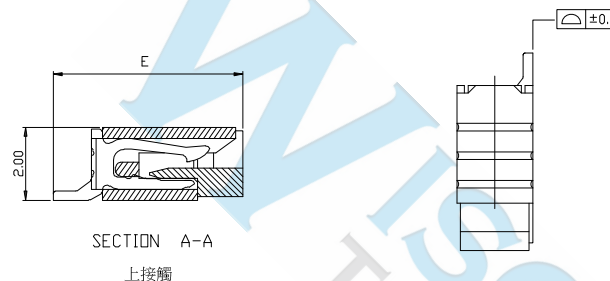

RECOMMENDED PCB LAYOUT

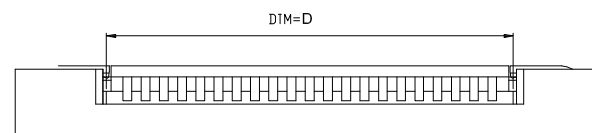

	PIN NO.	A	B	C	D	E
H	03	9.10	8.10	2.00	4.10	5.20
	04	10.10	9.10	3.00	5.10	5.20
	05	11.10	10.10	4.00	6.10	5.20
	06	12.10	11.10	5.00	7.10	5.20
D	07	13.10	12.10	6.00	8.10	5.20
	08	14.10	13.10	7.00	9.10	5.20
	09	15.10	14.10	8.00	10.10	5.20
	10	16.10	15.10	9.00	11.10	5.20
C	11	17.10	16.10	10.00	12.10	5.20
	12	18.10	17.10	11.00	13.10	5.20
	13	19.10	18.10	12.00	14.10	5.20
	14	20.10	19.10	13.00	15.10	5.20
B	15	21.10	20.10	14.00	16.10	5.20
	16	22.10	21.10	15.00	17.10	5.20
	17	23.10	22.10	16.00	18.10	5.65
	18	24.10	23.10	17.00	19.10	5.65
A	19	25.10	24.10	18.00	20.10	5.65
	20	26.10	25.10	19.00	21.10	5.65
	21	27.10	26.10	20.00	22.10	5.65
	22	28.10	27.10	21.00	23.10	5.65
B	23	29.10	28.10	22.00	24.10	5.65
	24	30.10	29.10	23.00	25.10	5.65
	25	31.10	30.10	24.00	26.10	5.65
	26	32.10	31.10	25.00	27.10	5.65
B	27	33.10	32.10	26.00	28.10	5.65
	28	34.10	33.10	27.00	29.10	5.65
	29	35.10	34.10	28.00	30.10	5.65

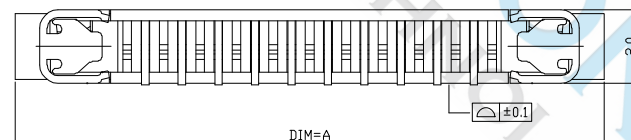

SPECIFICATIONS

Electrical Characteristics:

- 1.1 Voltage rating: 50V AC / DC
- 1.2 Current rating: 0.5A AC / DC
- 1.3 Temperature range: -25°C~+85°C
- 1.4 Withstand Voltage: 500V AC / Minute
- 1.5 Contact Resistance: 20mΩ MAX
- 1.6 Insulation resistance: 800MΩ MIN

Material:

- 1.1 Housing: LCP, UL94V-0
1.2 Contact: Phosphor Bronze, Tin PLated
1.3 Fitting Nail: Brass, Tin PLated
1.4 Slider: LCP, UL94V-0

DIMENSIONS TOLERANCE METRIC										UNITS	MM	FINISH	SEE NOTE	CH'K	Calvin	DRAW NAME		WISCONN Technology Co.,Ltd Tel:+886-2-2790-1979 Fax:+886-2-2790-1569									
Up to 5 ±0.2 Above 5~15 ±0.3 Above 15~30 ±0.4 Above 30~50 ±0.5 Angle ±0.3°										QTY	N/A	DRAW	Johnson	APP'D	Selena	FPC 1.0 CONN 2.0H SMT Drawer Top TYPE											
																PART NUMBER	WF10A3-A-xx-P-R										
																DRAW NUMBER	T002										
																FILE NAME .DWG		SCALE	1/1	SIZE	A4	SHEET	1	REV.	A		