
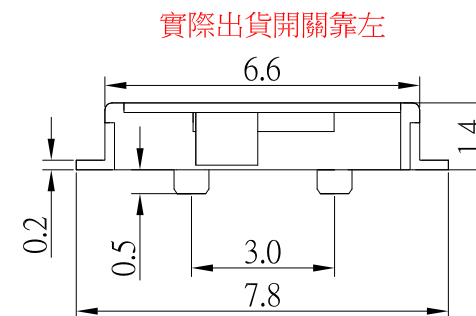
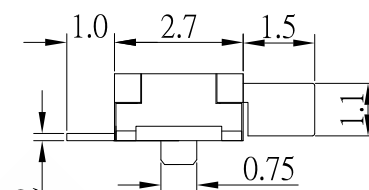
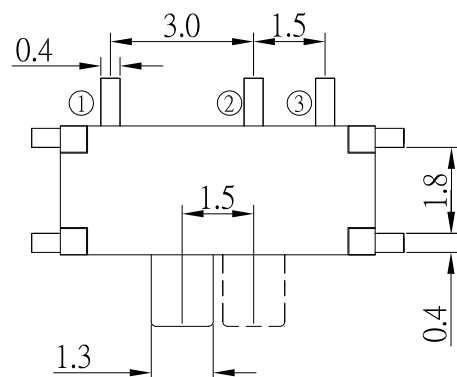


CIRCUIT DIAGRAM

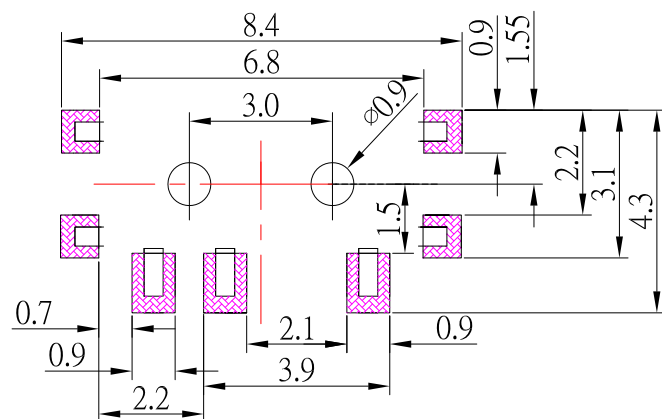

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	160 $\pm$ 100gf
Operating Life	10,000 cycles

F	CLIP	1	BeCu	Ag plated
E	TERMINAL	1	PHOSPHOR BRONZE	Ag plated
D	SPRING	1	SUS	
C	COVER	1	BRASS	Ag plated
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

A	DIMENSIONS TOLERANCE METRIC		單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審校(CH'K)	Calvin	圖名(NAME) SLIDE SWITCH 兩段式SMT側開關 (實際出貨開關靠左)		WISCONN Technology Co.,Ltd Tel:02-2790-1979 Fax:02-2790-1569						
	Up to 5 ±0.2	Above 5~15 ±0.3	數量(QTY)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	料號(PART NUMBER)	WSS-B90AP-x							
	Above 15~30 ±0.4	Above 30~50 ±0.5							圖號(DRAW NUMBER)	T002							
	Angle ±0.3°	材料(MTL)	SEE NOTE	設計(DE'N)	Mike	日期 DATE	JUN.04.2016	圖檔(FILE NAME .DWG)	比例 (SCALE)	1/1	圖紙 (SIZE)	A4	頁次 (SHEET)	1	版次 (REV.)	A	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14			