

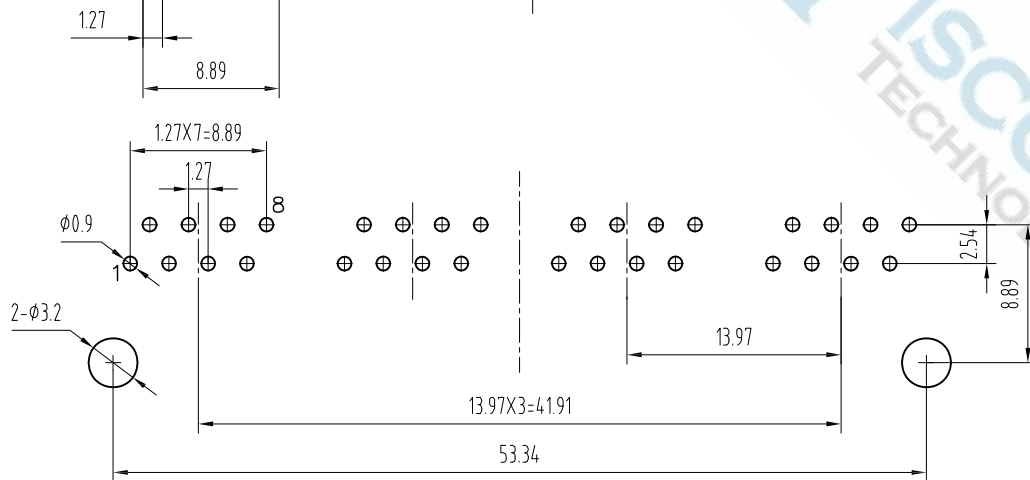
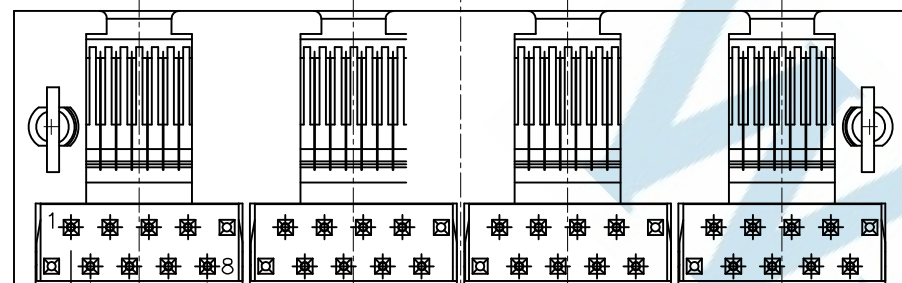


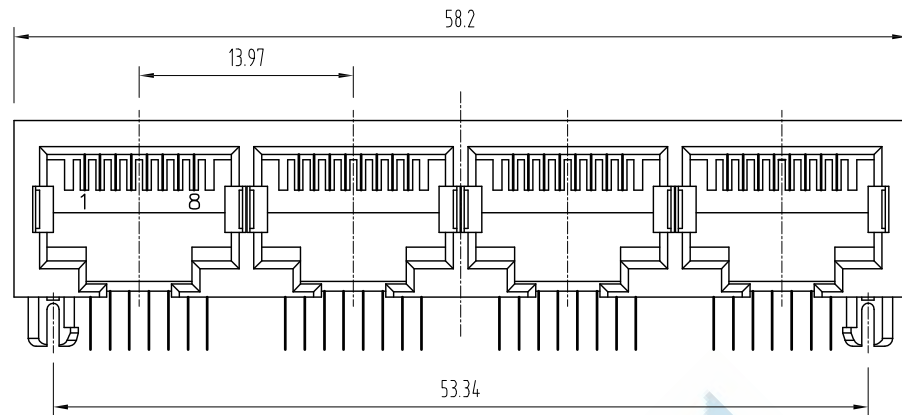

PCB LAYOUT

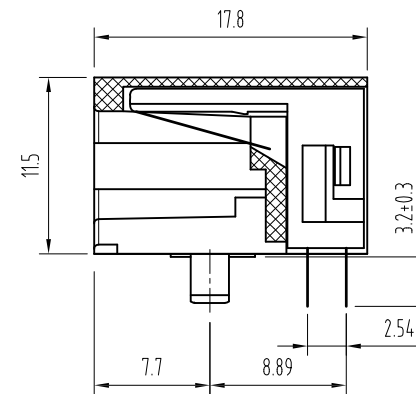

NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :1000 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC STRENGTH :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.HOUSING MATERIAL :LEAD FREE POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE T=0.35mm FLAT PIN OR $\phi 0.46$ mm ROUND PIN.
- 3.PLATING :GOLD PLATING OVER NICKEL.
- 4.OPERATING :750 CYCLES MIN.
- 5.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1.Temperature Range : -40℃~+85℃
- 2.Relative Humidity : 90~95% (40±2℃)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

DIMENSIONS TOLERANCE

METRIC

.0=±0.30
.00=±0.20
.000=±0.10
ANG.=±2°

單位(UNITS)

MM

處理(FINISH)

SEE NOTE

審校(CH'K)

Calvin

圖名(NAME)

RJ45 1x4 w/o SHIELDED&LED DIP

料號(PART NUMBER)

WRJ5H-1X4FN6BDR

圖號(DRAW NUMBER)

C001

圖檔(FILE NAME .DWG)

WISCONN Technology Co., Ltd

Tel:02-2742-1798 Fax:02-2742-1898

比例
(SCALE)

1/1

圖紙
(SIZE)

A4

頁次
(SHEET)

1

版次
(REV.)

A