

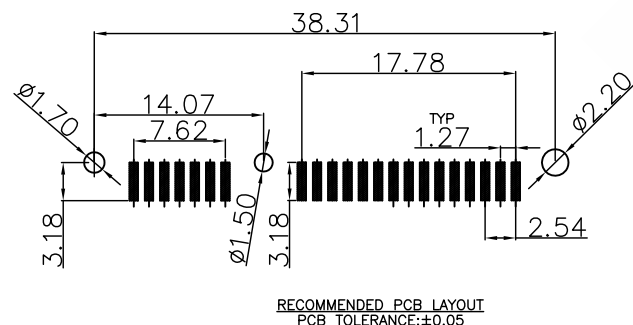

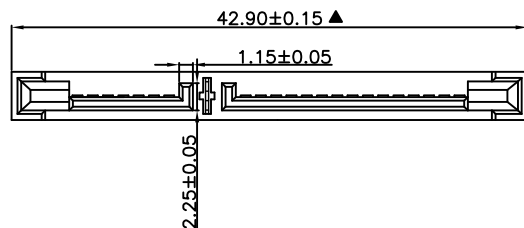


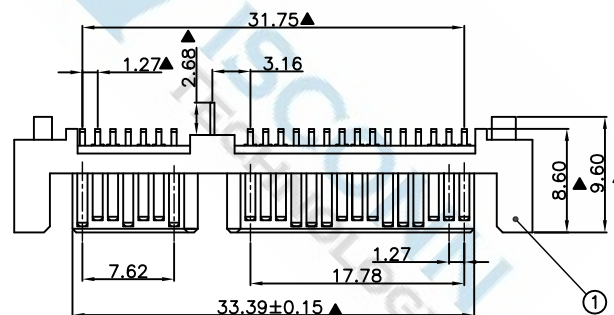

RECOMMENDED PCB LAYOUT
PCB TOLERANCE:±0.05

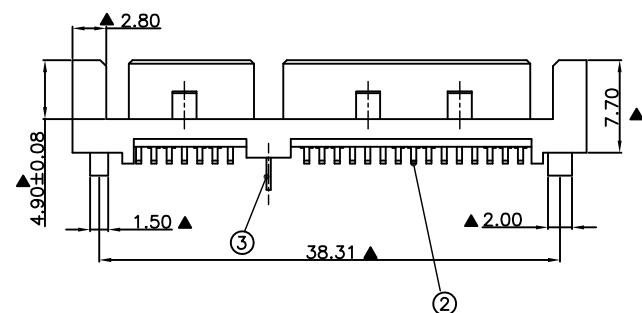

SPECIFICATION:

1.MATERIAL:

HOUSING:LCP UL 94V-0, COLOR:BLACK

CONTACT:BRASS C2680R-H,T=0.25mm

PEG: BRASS C2680R-H,T=0.30mm

2.FINISH:

CONTACT:1u" GOLD/TIN PLATING ON CONTACT AREA

100u" MIN. TIN PLATING ON SOLDERTAILS

50u" MIN.NICKEL UNDERPLATING OVER ALL

PEG:100u" MIN. TIN PLATING ON SOLDERTAILS

50u" MIN.NICKEL UNDERPLATING OVER ALL

3	Board lock	Brass C2680		Gold/Ni Plated
2	Terminal	Brass C2680		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

DIMENSIONS TOLERANCE METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審校(CH'K)	Calvin	圖名(NAME) SATA 7+15P 公座 SMT 180° 塑柱叉型 反向		WISCONN Technology Co., Ltd Tel:02-2742-1798 Fax:02-2742-1898							
	數量(QU'TY)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	料號(PART NUMBER)	WSTAM-22xxLBSV-R								
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期(DATE)	OCT.15.2007	圖號(DRAW NUMBER)	C002	比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	A
							圖檔(FILE NAME .DWG)									