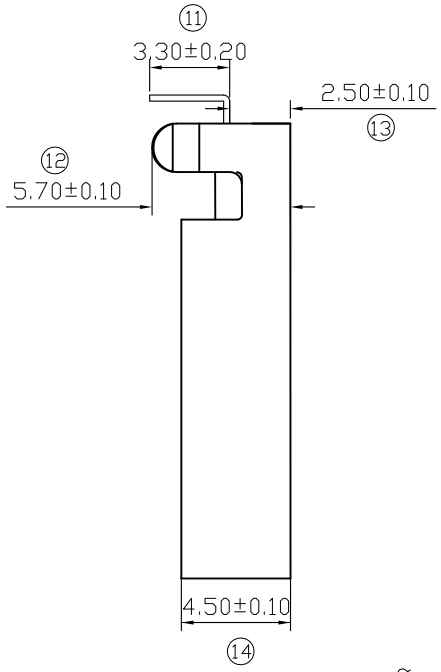

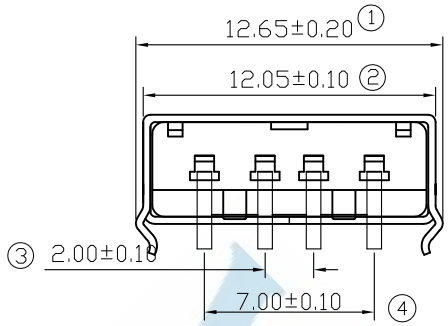

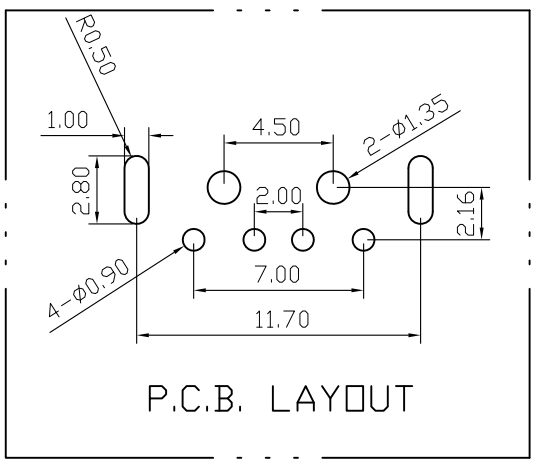

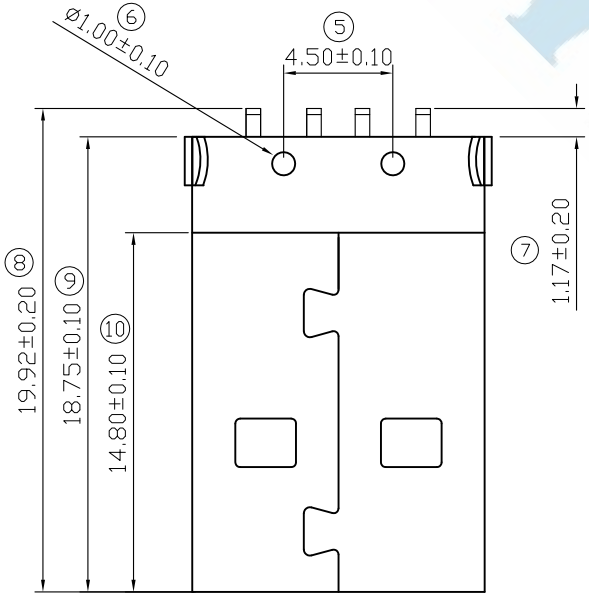

Note:

1.Material:

1.1 Insulator: L.C.P UL 94-V0 rated.
1.2 Contact: Brass,t=0.25mm.
1.3 Shell: Cold rolled steel,t=0.30mm.

2.Specification:

2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
2.3 Contact resistance: 30 mW Max.
2.4 Insulation resistance: 1000 MW Min at DC 500V.
2.5 Temperature range: -55°C~+240°C.

3.Finishes:

3.1 Contacts: Gold flashed 1u",3u",5u",10U",15u",30u".
3.2 Shell: Nickel plated.

DIMENSIONS TOLERANCE METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審校(CH'K)	Calvin	圖名(NAME) USB 2.0 AM PLUG DIP(青蛙腳)		WISCONN Technology Co.,Ltd					
	數量(QT'Y)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	料號(PART NUMBER)	WU2AM-04FLBDRF-5.7	Tel:02-2742-1798- Fax:02-2742-1898					
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期(DATE)	OCT.15.2007	圖號(DRAW NUMBER)	T003	比例 (SCALE)	1/1	圖紙 (SIZE)	A4	頁次 (SHEET)	1	版次 (REV.)	A
							圖檔(FILE NAME .DWG)							