



**P.C.B LAYOUT
TOP VIEW**

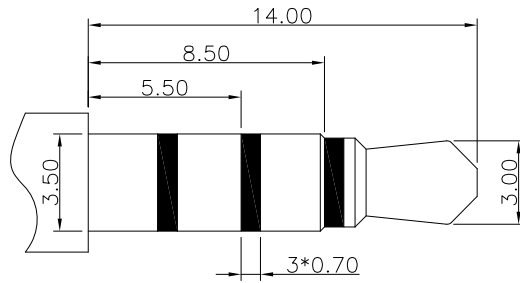


∅3.50mm 4 POLE PLUG



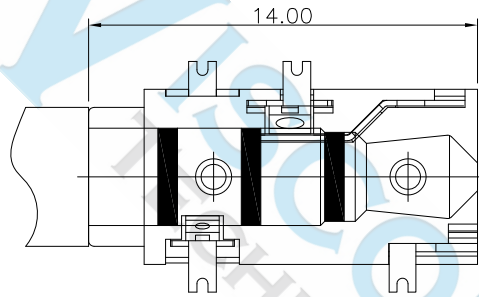


SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : ≤30mΩ
3. Insulation resistance : ≥100MΩ
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles °



SCHEMATIC

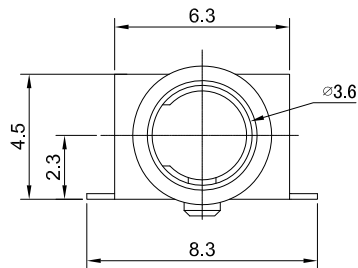

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	BRASS	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

DIMENSIONS TOLERANCE METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	UNITS	MM	FINISH	SEE NOTE	CH'K	Calvin	DRAW NAME		WISCONN Technology Co., Ltd Tel:+886-2-2790-1979 Fax:+886-2-2790-1569						
	QTY	N/A	DRAW	Johnson	APP'D	Selena	PHONE JACK								
	MT'L	SEE NOTE	DE'N	Mike	DATE	December.10.2018	PART NUMBER	WPJ-3896D							
							DRAW NUMBER	T002	SCALE	1/1	SIZE	A4	SHEET	1	REV.