



SPECIFICATION:

- 1.MATERIAL:**
 HOUSING:LCP UL 94V-0, COLOR:BLACK
 CONTACT:BRASS C2680R-H,T=0.25mm
 PEG: BRASS C2680R-H,T=0.30mm
- 2.FINISH:**
 CONTACT:1u" GOLD/TIN PLATING ON CONTACT AREA
 100u" MIN. TIN PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL
 PEG:100u" MIN. TIN PLATING ON SOLDERTAILS
 50u" MIN.NICKEL UNDERPLATING OVER ALL

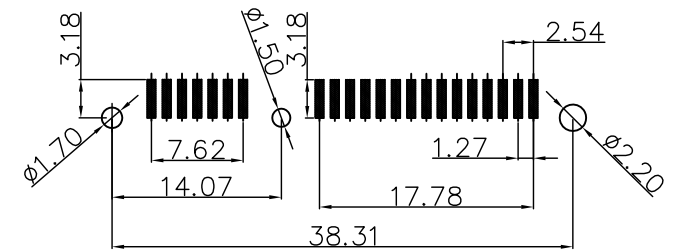

RECOMMENDED PCB LAYOUT
 PCB TOLERANCE:±0.05

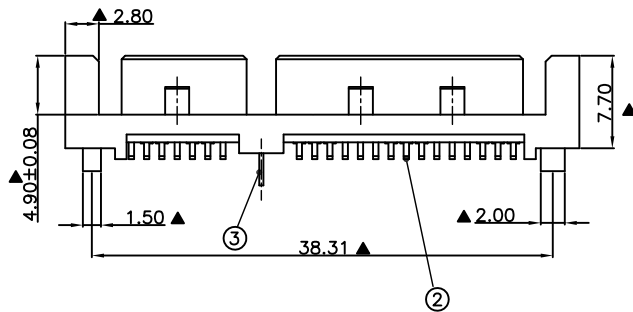

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
3	Board lock	Brass C2680		Gold/Ni Plated
2	Terminal	Brass C2680		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0

DIMENSIONS TOLERANCE METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審核(CH'K)	Calvin	圖名(NAME) SATA 7+15P 公座 SMT 180° 塑柱魚叉型	WISCONN Technology Co., Ltd Tel:02-2742-1798 Fax:02-2742-1898						
	數量(QTY)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena								
	料號(PART NUMBER)	WSTAM-22xxLSV						料號(DRAW NUMBER)	C002					
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期 DATE)	OCT.15.2007	圖檔(FILE NAME .DWG)	比例 (SCALE)	1/1	圖紙 (SIZE)	A4	頁次 (SHEET)	1	版次 (REV.)